










| COMPONENTS | IMPEDANCE |
|------------|-----------|
| FAKRA JACK | 50 OHM |
| SMA FEMALE | 50 OHM |
| RG316/U | 50 OHM |
| | |

| Standard Lengths | |
|------------------|---------------------------|
| -30 | 30CM |
| -60 | 60CM |
| -90 | 90CM |
| -120 | 120CM |
| -150 | 150CM |
| -XX | Custom Length centimeters |

Part Configurator

1. Replace Y with code.
2. Replace XX with length in inches.

| CODING | JACK | COLOR | APPLICATION |
|--------|-------------------------------------------------------------------------------------|------------|------------------------------------------|
| A |  | BLACK | RADIO WITH PHANTOM SUPPLY |
| B |  | WHITE | RADIO WITHOUT PHANTOM SUPPLY |
| C |  | BLUE | GPS: TELEMATICS OR NAVIGATION |
| D |  | BORDEAUX | GSM: CELLULAR PHONE |
| H |  | VIOLET | GPS: TELEMATICS AND NAVIGATION |
| I |  | BEIGE | BLUETOOTH |
| K |  | CURRY | RADIO WITH IF OUTPUT (ANTENNA DIVERSITY) |
| Z |  | WATER BLUE | NEUTRAL CODING |

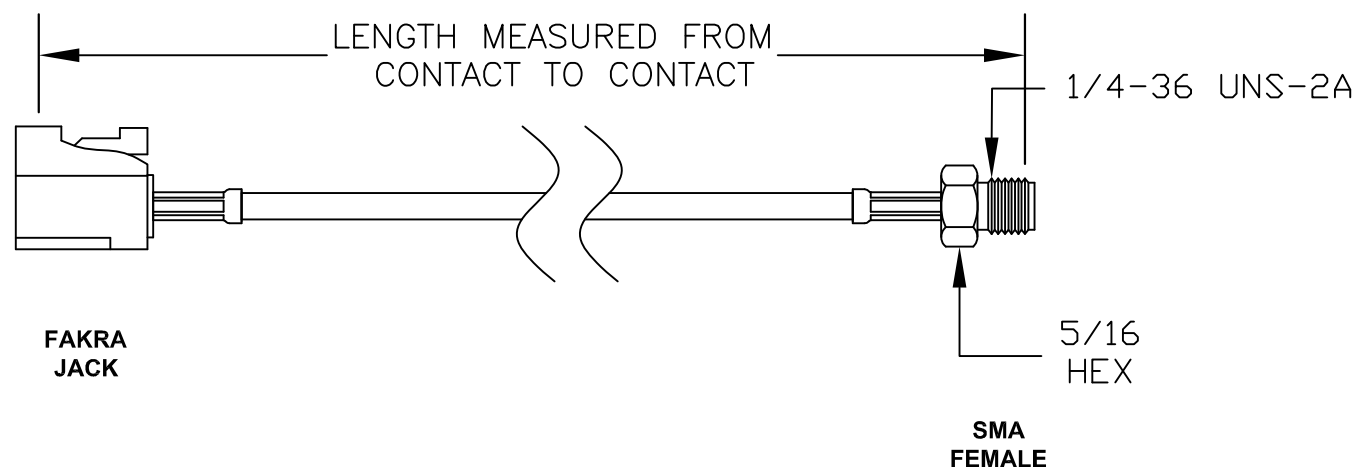

superbat
Shenzhen Superbat Electronics Co., Ltd.

TEL: 86-755-25614980

Mail box: info@superbatrf.com

Web site: <http://www.superbatrf.com/>

Address:

7th Floor Comprehensive Building, Jiang Hao Technology Industrial Park, Ji hua Rd, ShenZhen, GD, China 518129

RF Cable Assemblies

DWG TITLE:
AC-F03BSJ-S01SJ-316

DES. FAKRA JACK TO SMA FEMALE, RG316/U COAX

Notes:

1. Unless otherwise specified all dimensions are nominal
2. All specifications are subject to change without notice at any time.
3. Dimensions are in inches.
4. Length tolerance is $\pm 1.5\%$ or $\pm 0.96\text{cm}$, whichever is greater.